

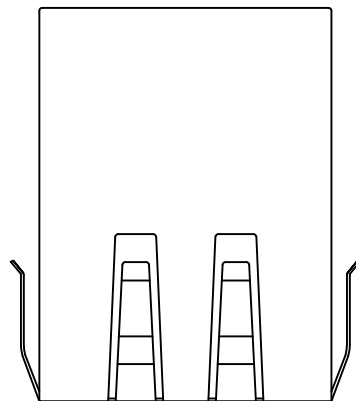


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2020.08.08	CINDY.LI

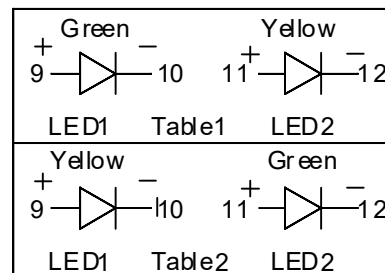

LED Type:

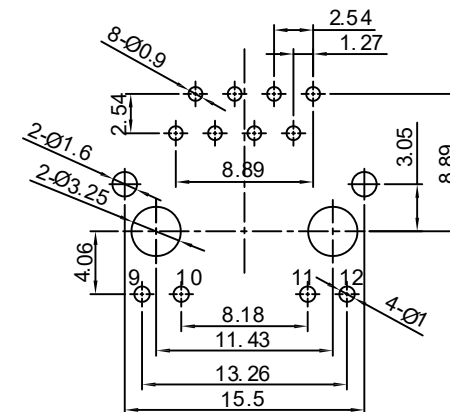

Recommend PCB layout
(Tolerance±0.05)

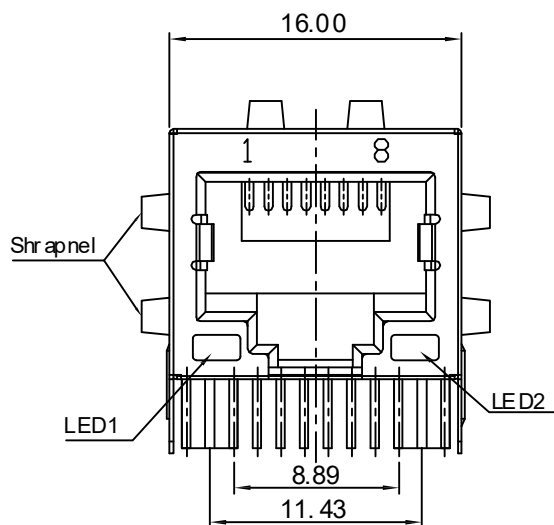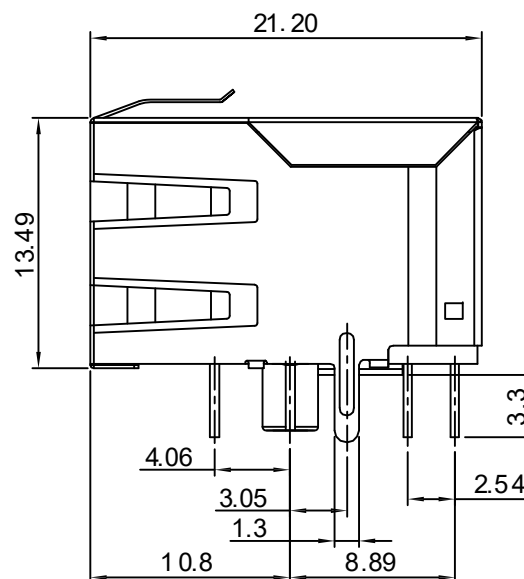

NOTES:

- Electrical characteristics:
 - Contact resistance: 30mΩ Max.
 - Dielectric withstanding voltage: 1000V AC(rms) for 1 minute.
 - Insulation resistance: 1000MΩ Min.
 - Current rating:1.5A.
- Environment characteristics:
 - Temperature: -40°C~+85°C.
- Materials:
 - Contact material: Copper alloy.
 - Contact plating: Selective gold
 - Insulator materials: Thermoplastic,Black.



UNMARKED TOLERANCES		TITLE		2009	
DIMENSIONS	TOLERANCE	RJ45 MODULE JACK CONNECTOR		KIMKEE.LTD	
x	±0.5	1PORT W/LED PCB DIP SOLDER		www.kimkee.cn	
x.x	±0.25	CUSTOMER		CUSTOMER PART NO.	
x.xx	±0.15	DRAWN BY		PART NUMBER	
0 to 500	+15 / -0	CHECKED BY		DRAWING NUMBER	
> 501	+3W/-0 of length	APPROVED BY		SCALE FREE	
ANGLES		HUAHUA.HE		ALL DIMENSION UNIT IN MM	
x°	±1°			SHEET 1 OF 1	