

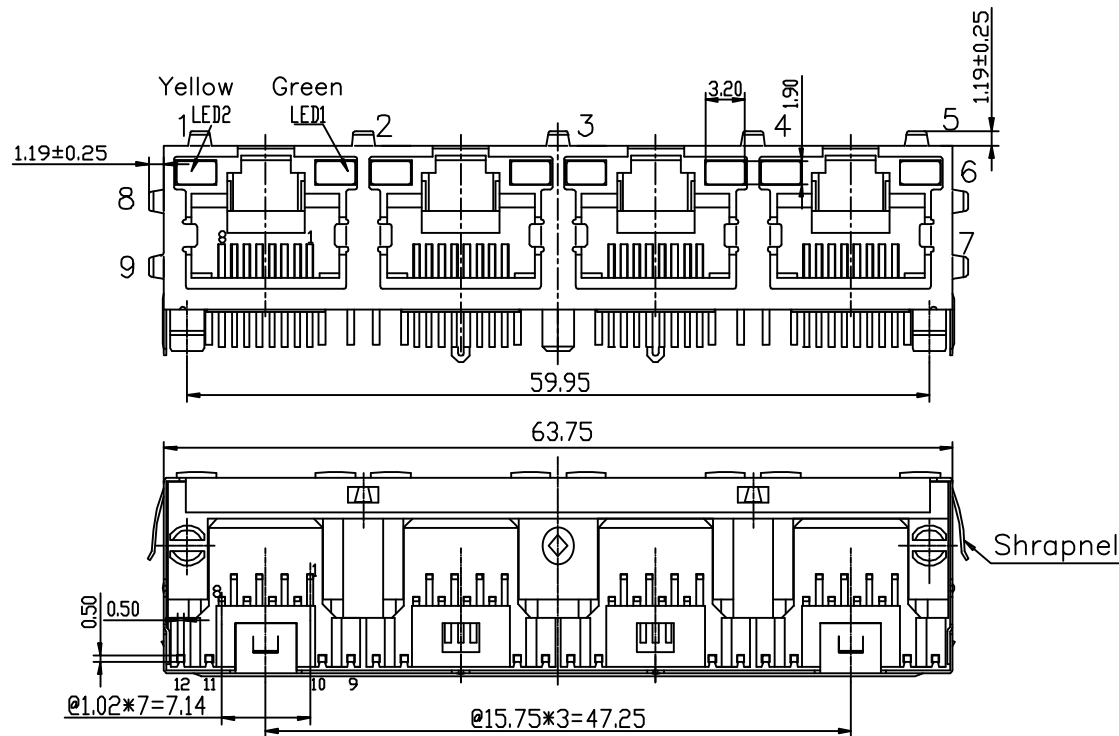


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

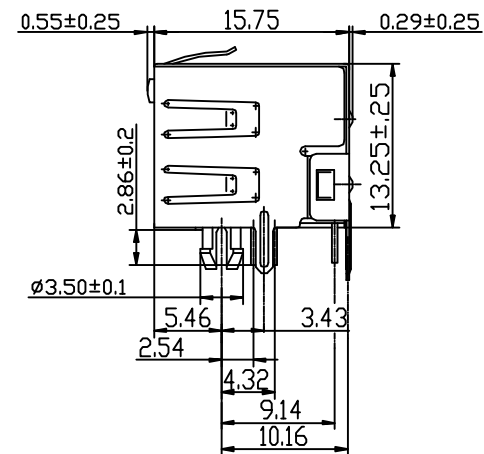

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - VOLTAGE RATING:125V.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+85°C.
- MATERIALS
 - CONTACT MATERIAL: COPPER ALLOY.
 - CONTACT PLATING: SELECTIVE GOLD.
 - INSULATOR MATERIALS: PBT OR NYLON BLACK.

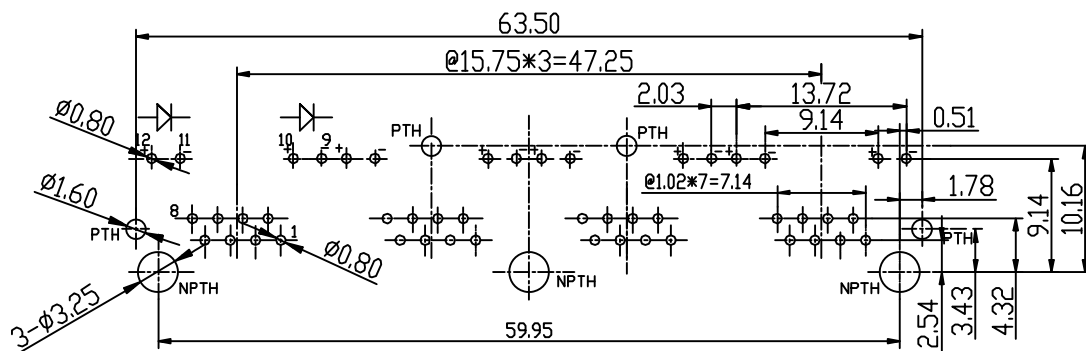

PC BOARD LAYOUT
THICKNESS=1.6mm

UNMARKED TOLERANCES		TITLE		2009	
DIMENSIONS	TOLERANCE	RJ45 MODULE JACK CONNECTOR		KIMKEE.LTD	
x	±0.5	4 PORT W/LED PCB DIP SOLDER		www.kimkee.cn	
x.x	±0.25	CUSTOMER		CUSTOMER PART NO.	
x.xx	±0.15	DRAWN BY		PART NUMBER	
0 to 500	+15 / -0	CHECKED BY		DRAWING NUMBER	
> 501	+3W/-0 of length	APPROVED BY		SCALE FREE	
ANGLES		HUAHUA.HE		ALL DIMENSION UNIT IN MM	
x°	±1°			SHEET 1 OF 1	