


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2019.09.01	CINDY.LI

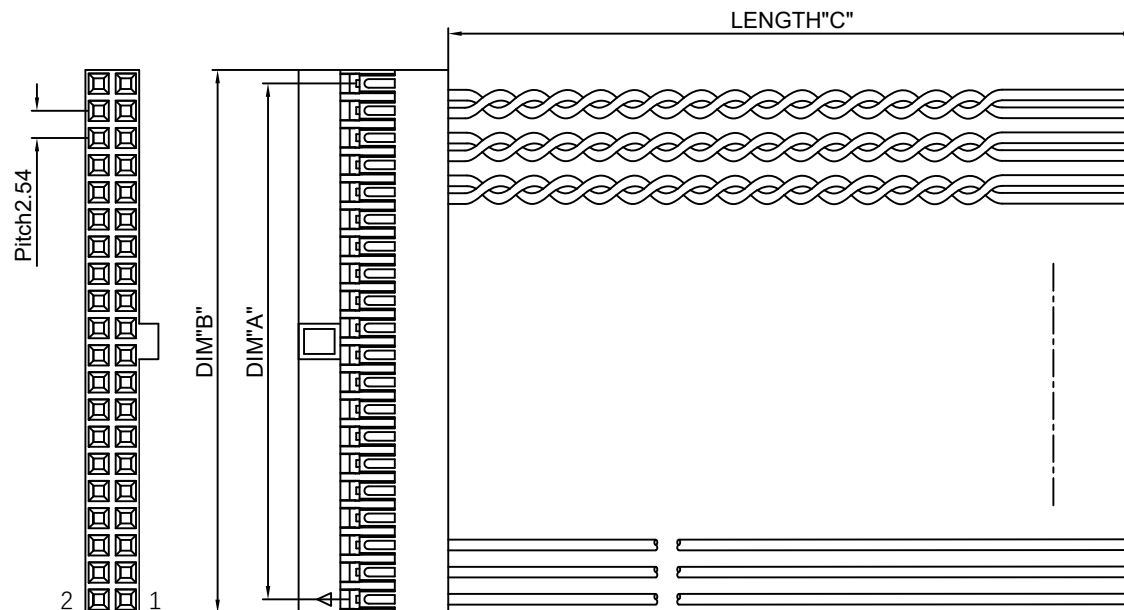

Specifications :

Voltage rating: 250V AC / DC.

Current rating: 3A AC / DC.

Withstanding voltage: 1500V AC/minute.

Temperature range: - 25°C ~ + 85°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: ≤ 20mΩ.

Matching contact: DUPONT2.54.

Applicable wires(AWG or mm²): 24AWG ~ 30AWG.



Circuits	Dimensions				
	A	B			
2*2P	2.54	5.08	2*21P	50.80	53.34
2*3P	5.08	7.62	2*22P	53.34	55.88
2*4P	7.62	10.16	2*23P	55.88	58.42
2*5P	10.16	12.70	2*24P	58.42	60.96
2*6P	12.70	15.24	2*25P	60.96	63.50
2*7P	15.24	17.78	2*26P	63.50	66.04
2*8P	17.78	20.32	2*27P	66.04	68.58
2*9P	20.32	22.86	2*28P	68.58	71.12
2*10P	22.86	25.40	2*29P	71.12	73.66
2*11P	25.40	27.94	2*30P	73.66	76.20
2*12P	27.94	30.48	2*31P	76.20	78.74
2*13P	30.48	33.02	2*32P	78.74	81.28
2*14P	33.02	35.56	2*33P	81.28	83.82
2*15P	35.56	38.10	2*34P	83.82	86.36
2*16P	38.10	40.64	2*35P	86.36	88.90
2*17P	40.64	43.18	2*36P	88.90	91.44
2*18P	43.18	45.72	2*37P	91.44	93.98
2*19P	45.72	48.26	2*38P	93.98	96.52
2*20P	48.26	50.80	2*39P	96.52	99.06
			2*40P	99.06	101.60

UNMARKED TOLERANCES		TITLE		2009			
DIMENSIONS	TOLERANCE	Pitch2.54mm DOUBLE ROW HOUSING WIRING HARNESS		KIMKEE.LTD			
x	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0						
> 501	+3W/-0 of length						
ANGLES							
x°	±1°						
		CUSTOMER		CUSTOMER PART NO.			
		DRAWN BY		PART NUMBER			
		CHECKED BY		DRAWING NUMBER			
		APPROVED BY		SCALE FREE			
				ALL DIMENSION UNIT IN MM			