


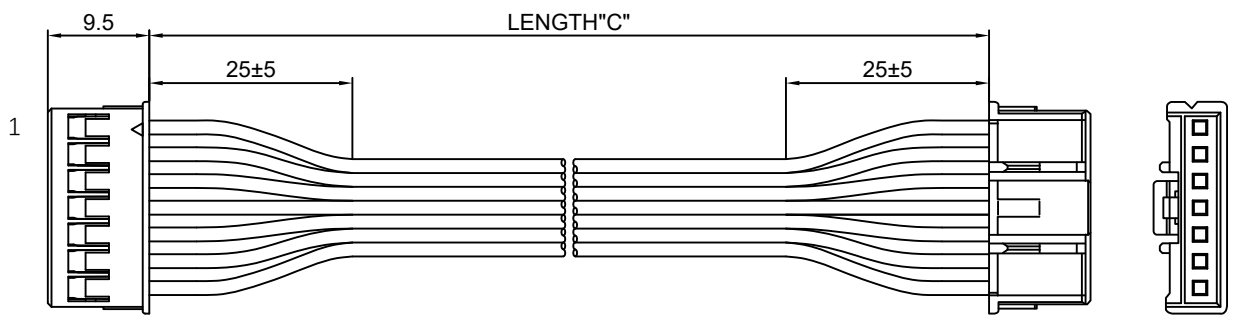

Circuits	Dimensions		
	A	B	C
02P	2.50	5.64	7.30
03P	5.00	8.14	9.80
04P	7.50	10.64	12.30
05P	10.00	13.14	14.80
06P	12.50	15.64	17.30
07P	15.00	18.14	19.80
08P	17.50	20.64	22.30
09P	20.00	23.14	24.80
10P	22.50	25.64	27.30
11P	25.00	28.14	29.80
12P	27.50	30.64	32.30
13P	30.00	33.14	34.80
14P	32.50	35.64	37.30
15P	35.00	38.14	39.80
16P	37.50	41.64	42.30
17P	40.00	44.14	44.80
18P	42.50	46.64	47.30
19P	45.00	49.14	49.80
20P	47.50	51.64	52.30

Specifications :

Voltage rating: 250V AC / DC.

Current rating: 3.0A AC / DC.

Withstanding voltage: 1000V AC/minute.


Temperature range: - 40°C ~ + 105°C.

Insulation resistance: ≥ 1000MΩ.

Contact resistance: 10mΩ MAX.

Matching contact: SXA-001T-P0.6.

Applicable wires(AWG or mm²): 22AWG ~ 28AWG.

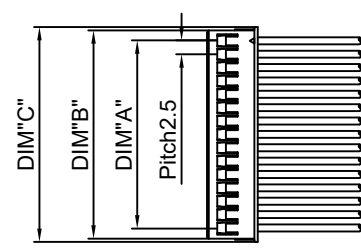

UNMARKED TOLERANCES		TITLE		2009			
DIMENSIONS	TOLERANCE	PITCH2.5mm WIRING HARNESS HOUSING SINGLE ROW					
x	±0.5	CUSTOMER	-	CUSTOMER PART NO.	-		REV A
x.x	±0.25	DRAWN BY	CINDY.LI	PART NUMBER	XAP-07V-1		
x.xx	±0.15	CHECKED BY	CLARA.TANG	DRAWING NUMBER	xap		
0 to 500	+15 / -0	APPROVED BY	HUAHUA.HE	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
> 501	+3W/-0 of length						
ANGLES							
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KIMKEE.LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

F

